




RoHS
COMPLIANT







3 PIN



2 PIN



WITH CAP VIEW

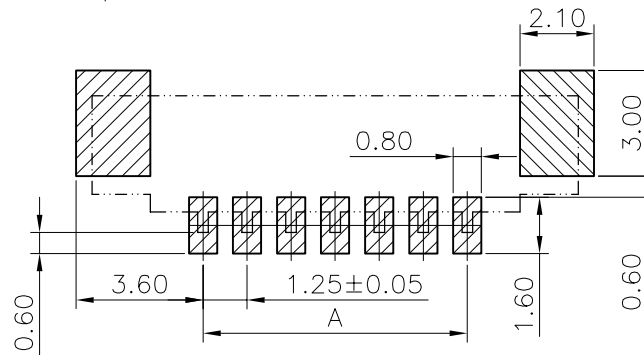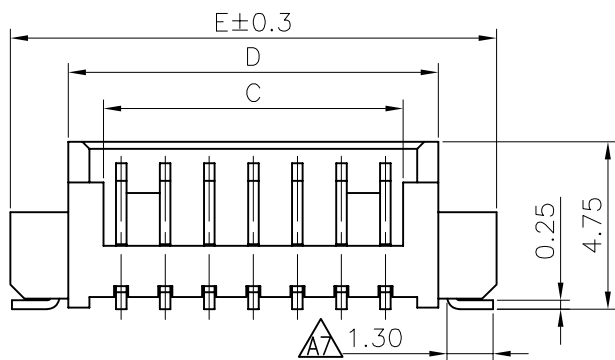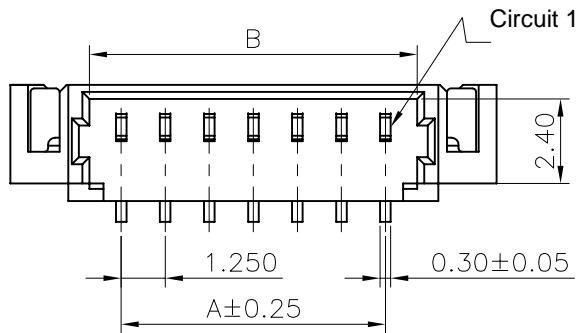

Recommended P.C.Board Layout

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: LCP/PA46 UL 94V-0
Contact: Brass
Solder Tab: Brass

Plating: Matte Tin or gold plated over Nickel

Circuits: 2-16

Suitable: KR1250 series Housing

Odering Code:

C1250VS 1*** **01 * A

102=2P R:Reel

116=16P P:Bag

07:PA46 ecru M01:Matte tin plating

08:PA46 black G02:Gold plated 1u"

13:LCP ecru

34:PA46 red

CTK	DIMENSIONS				
	A	B	C	D	E
2	1.25	3.05	2.25	4.25	7.25
3	2.50	4.30	3.50	5.50	8.50
4	3.75	5.55	4.75	6.75	9.75
5	5.00	6.80	6.00	8.00	11.00
6	6.25	8.05	7.25	9.25	12.25
7	7.50	9.30	8.50	10.50	13.50
8	8.75	10.55	9.75	11.75	14.75
9	10.00	11.80	11.00	13.00	16.00
10	11.25	13.05	12.25	14.25	17.25
11	12.50	14.30	13.50	15.50	18.50
12	13.75	15.55	14.75	16.75	19.75
13	15.00	16.80	16.00	18.00	21.00
14	16.25	18.05	17.25	19.25	22.25
15	17.50	19.30	18.50	20.50	23.50
16	18.75	20.55	19.75	21.75	24.75

F		Uniformly arrange the drawings	Shen	2021.08.30	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3°	TITLE: MK1.25 SM ^{180°} WF	DRAWN: Shen 2022.05.10		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.				
		Add Plastic to increase structural strength	Cai	2020.12.24			CHECKED:					PART NO.: C1250VS1*****01*A	
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: 1/1	SHEET: 1/1	PROJECTION	REV.: A7	DRAWING NO.: 1250WS101-A-S	
	1	2	3	4			5	6	7	8	9		