



RoHS
COMPLIANT

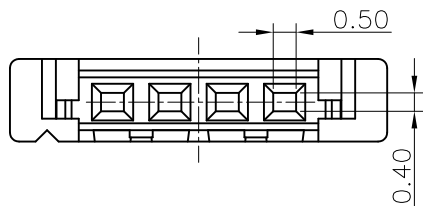

3D View

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Insulator: Nylon 66 UL 94V-0

Circuits: 2~15,20,30



Suitable: KR1253 series Wafer

Ordering Code:


H125301****01A

102=02P
103=03P



01:PA66 UL94 V-0 white
02:PA66 UL94 V-0 black
22:PA66 UL94 V-0 beige

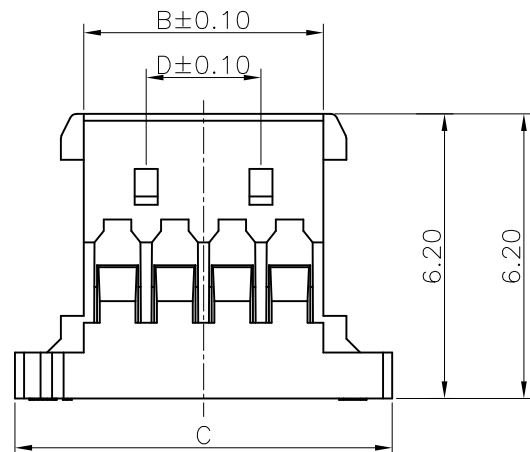

2P



3P

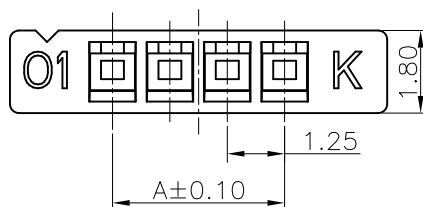

Pin	Dimension			
	A	B	C	D
2P	1.25	2.72	5.72	
3P	2.50	3.97	6.97	
4P	3.75	5.22	8.22	2.50
5P	5.00	6.47	9.47	3.75
6P	6.25	7.72	10.72	5.00
7P	7.50	8.97	11.97	6.25
8P	8.75	10.22	13.22	7.50
9P	10.0	11.47	14.47	8.75
10P	11.25	12.72	15.72	10.00
11P	12.50	13.97	16.97	11.25
12P	13.75	15.22	18.22	12.50
13P	15.00	16.47	19.47	13.75
14P	16.25	17.72	20.72	15.00
15P	17.50	18.97	21.97	16.25
16P	18.75	20.22	23.22	17.50
20P	23.75	25.22	28.22	22.50
30P	34.00	37.72	40.72	35.00

F		Uniformly arrange the drawings	Shen	2021.08.30	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: MX1.25 Ultra-thin Housing	DRAWN: Shen 2021.08.30		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
		Change the part number and frame format	TLX	2020.03.28			CHECKED:				
	MARK		REVISION DESCRIPTION	SIGNATURE			DATE	APPROVED:			
	1	2	3	4	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION	REV.:A3	DRAWING NO.:1253H01-A-S	