
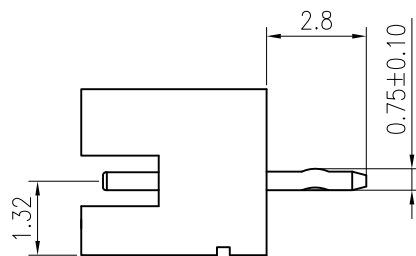


RoHS
COMPLIANT

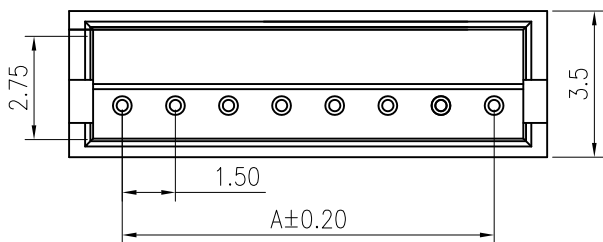

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 100V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: PA66 or PA46 UL 94V-0

Contact: Brass

Plating: Tin plated over nickel

Circuits: 2~13

Mates With KR1501 series Housing

Ordering Code:

C1501VD *** ** T0101PA



No. of Circuits

102:2P, 113:13P

Insulator Material

07:PA46 Natural

19:PA66 Grey

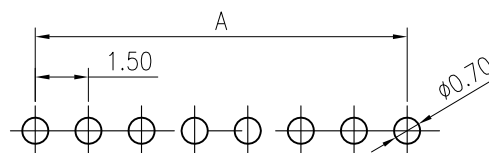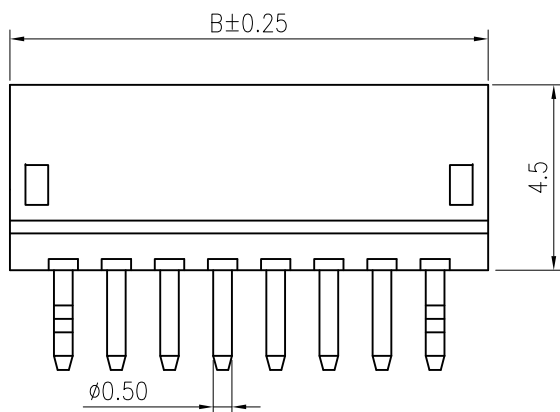

Recommended P.C.B. Layout
Total tolerance:±0.05mm

PIN NO.	DIMENSIONS		PIN NO.	DIMENSIONS	
	A	B		A	B
02P	1.50	4.50	08P	10.50	13.50
03P	3.00	6.00	09P	12.00	15.00
04P	4.50	7.50	10P	13.50	16.50
05P	6.00	9.00	11P	15.00	18.00
06P	7.50	10.50	12P	16.50	19.50
07P	9.00	12.00	13P	18.00	21.00



MARK

Uniformly arrange the drawings
Change the part number and frame format

Shen
Ru yi

2021.9.22
2020.3.10

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
ZH1.5 DIP 180°
Wafer Strike K

DRAWN: Shen 2021.09.22

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: C1501VD*****T0101PA

UNIT:mm SCALE:1/1 SHEET:1/1 PROJECTION REV.:A3 DRAWING NO.:1501WVD101-A-S

1

2

3

4

5

6

7

8

9