





RoHS
COMPLIANT

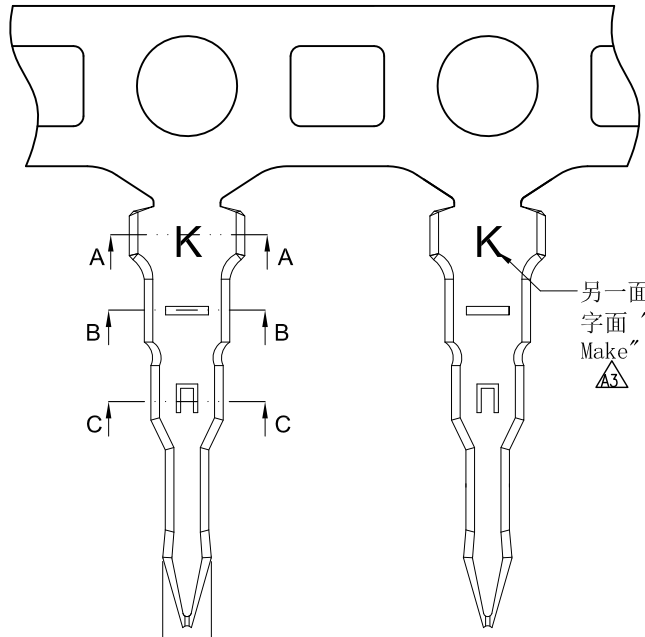


0.73±0.08
A2 A3





SECTION:A-A




1.50
A1



SECTION:B-B

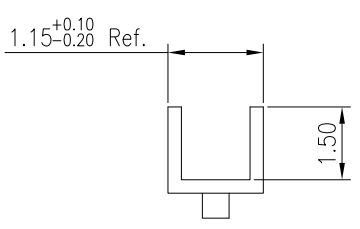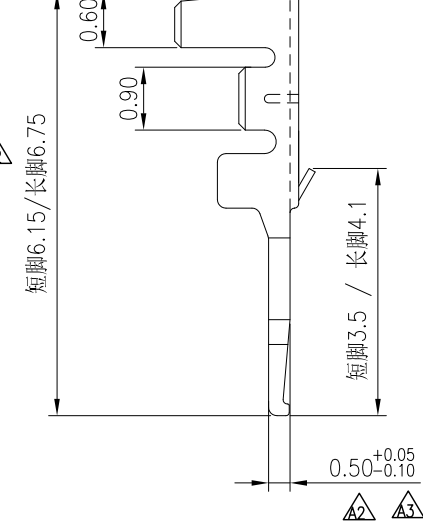

SECTION:C-C

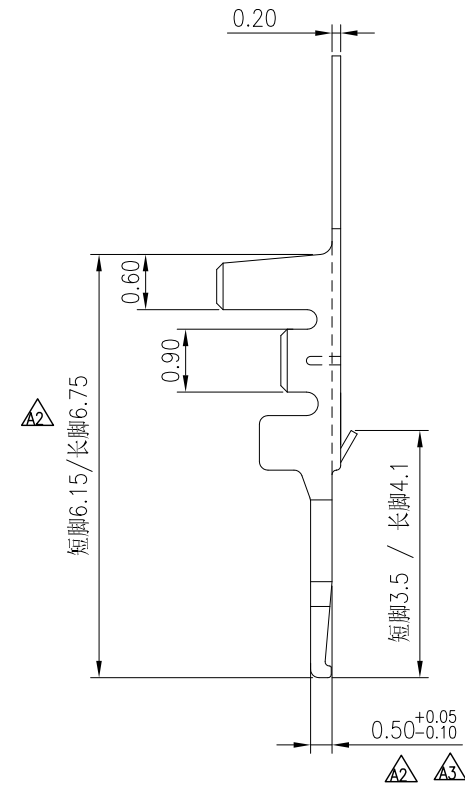

另一面为
字面
Make

- ◆ SPECIFICATIONS
- Current rating: 1A AC, DC
 - Voltage rating: 200V AC,DC
 - Temperature range: -40°C ~ +105°C
 - Insulation resistance: 500MΩ Min.
 - Withstanding voltage: 500V AC/ minute.
 - Contact resistance: 20mΩ Max.

Material: Phosphor Bronze
Finish: Tin Plated
Applicable wires:
Conductor size: AWG #28~#30
Insulation O.D: 1.0mm Max.
Suitable: KR1502 series Housing
Qty/reel:15,000PCS

Ordering Code:
T1502VPT01 ** A
└ Type
01:Standard
02:Long

F	A4	Change the part number and frame format	Arvin	2020.12.05	TOLERANCE X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±1°	TITLE: SZN1.5 180° Terminal	DRAWN: TLX 2020.04.22		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.
	A3	Modify size	Wesley	2020.04.28			CHECKED:		
	A2	Update drawings	TLX	2020.04.22			APPROVED:		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT:mm	SCALE:N/A	