




RoHS
COMPLIANT

SPECIFICATIONS

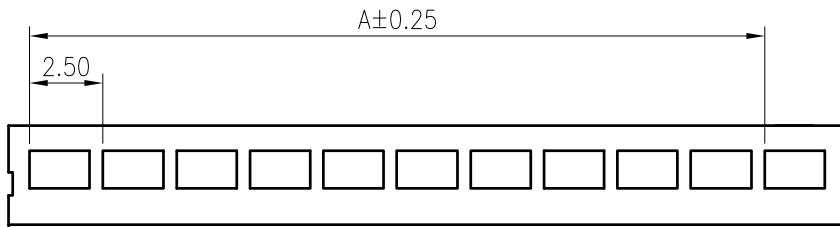

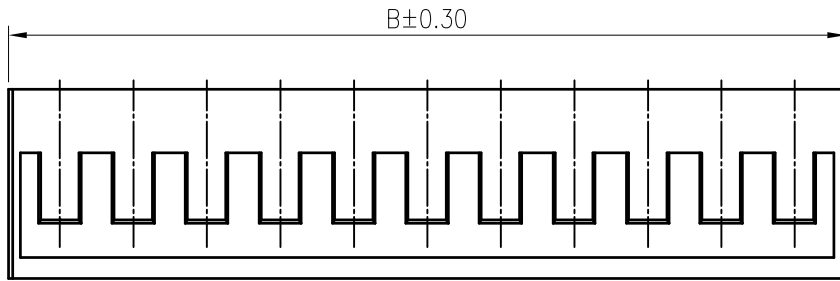

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 10mΩ Max.




Material: Nylon 66 UL 94V-0
 Suitable KR2508 series terminal
 Mate with KR2508 series wafer
 Ordering Code:

 H2508R *** 01 **B

No. of Circuits  102:2,116:16
 Insulator Material  00:HF
 01:PA66 White V0 01:Standard

Circuits	Dimensions	
	A	B
2	2.50	6.00
3	5.00	8.50
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
15	37.50	41.00



F		TOLERANCE		TITLE:		DRAWN: <i>Arwin 2020.10.30</i>		KONNRA 东莞市康瑞电子有限公司	
		X.X ±0.30		SCN2.5 90° Housing		CHECKED:		DongGuan Konnra Electronics Co.,Ltd.	
		X.XX ±0.20				APPROVED:		PART NO.: H2508R***01**B	
MARK		REVISION DESCRIPTION		SIGNATURE		DATE		REV.: A2	
1		2		3		4		5	
UNIT:mm		SCALE:N/A		SHEET:1/1		PROJECTION 		DRAWING NO.: 2508HR101-B-S	
6		7		8		9			