
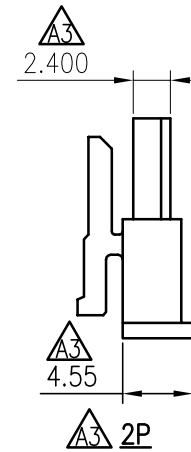

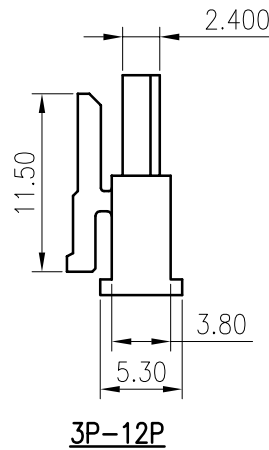
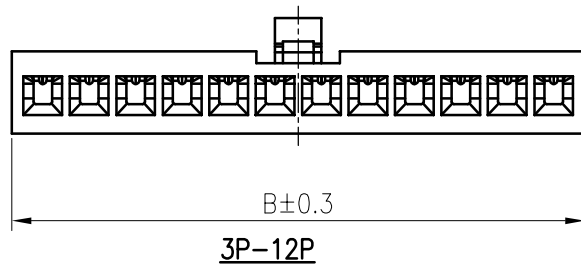
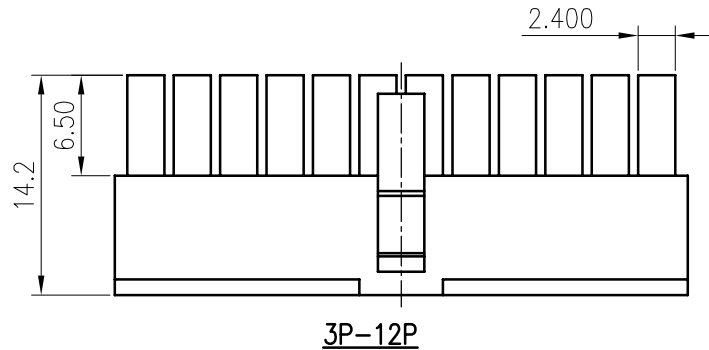


RoHS  
COMPLIANT

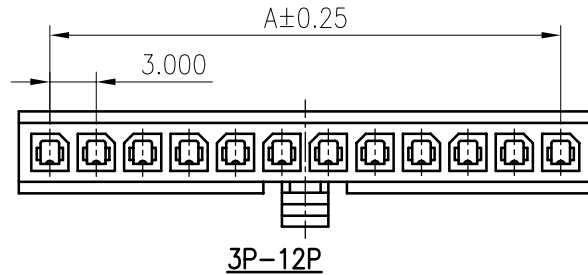

**SPECIFICATIONS**

1. Current rating: 5A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C  $\triangle A4$
4. Insulation resistance: 1000M $\Omega$  Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10m $\Omega$  Max.

Material: PA66 UL94 V-0 or V-2

Circuits: 2~12

Suitable: KR3000HM series terminal

Mate With KR3000HF series single row housing and kr3000 series single row wafer

Ordering Code:

H3000M \*\*\* \*\* 01A  $\triangle A5$

No. of Circuits  
102:2P, 112:12P

Insulator Material  
02:PA66 UL94V-0 black  
04:PA66 UL94V-2 black

Circuits	Dimensions	
	A	B
2P	3.0	7.00
3P	6.0	10.00
4P	9.0	13.00
5P	12.0	16.00
6P	15.0	19.00
7P	18.0	22.00
8P	21.0	25.00
9P	24.0	28.00
10P	27.0	31.00
11P	30.0	34.00
12P	33.0	37.00

F	$\triangle A7$				TOLERANCE X. X $\pm 0.30$ X. XX $\pm 0.20$ X. XXX $\pm 0.10$ Angle $\pm 2^\circ$	TITLE: MK3.0 Male Housing Single Row	DRAWN: TLX 2020.04.08		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
	$\triangle A6$	Uniformly arrange the drawings	Arvin	2021.09.24			CHECKED:				
	$\triangle A5$	Change the part number and frame format	TLX	2020.04.08			APPROVED:		PART NO. : H3000M****01A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A6
	1	2	3	4		5	6	7	8	9	