
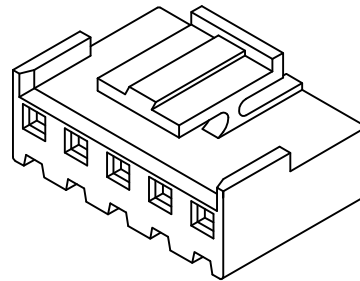




**RoHS**  
COMPLIANT

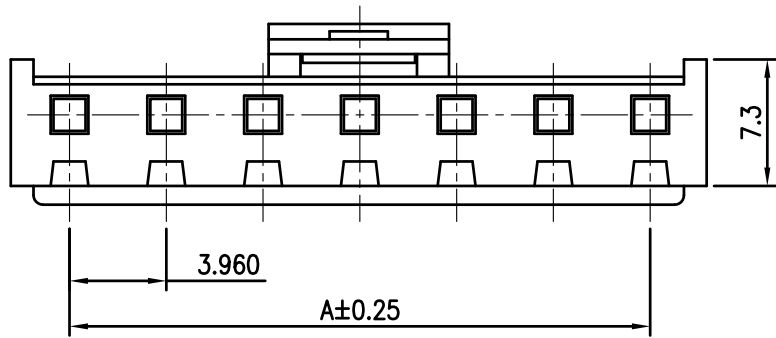

**SPECIFICATIONS**

1. Current rating: 7A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94V-0  
Suitable KR3961 series terminal  
Mate with KR3961 series wafer

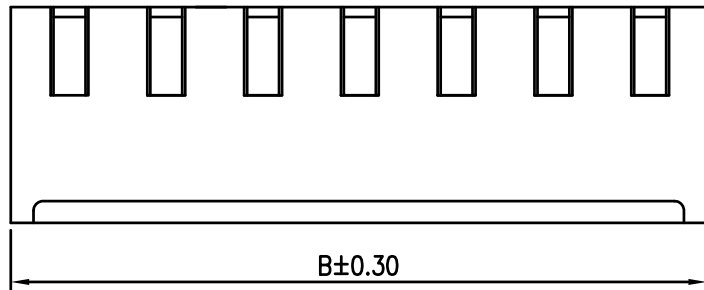


Ordering Code:

H39610 xxx 01 01A

No. of Circuits  
102:2, 116:16

Insulator Material  
01: PA66 White V0

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	3.96	7.92	10	35.64	39.60
3	7.92	11.88	11	39.60	43.56
4	11.88	15.84	12	43.56	47.52
5	15.84	19.80	13	47.52	51.48
6	19.80	23.76	14	51.48	55.44
7	23.76	27.72	15	55.44	59.40
8	27.72	31.68	16	59.40	63.36
9	31.68	35.64			

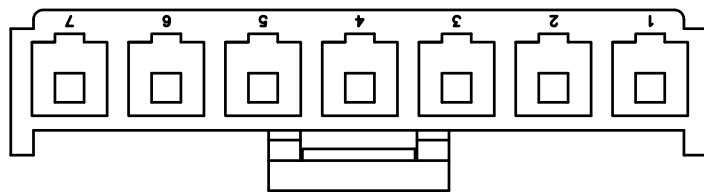

Change the part number and frame format

Arvin

2020.05.08

TOLERANCE  
X.X ±0.30  
X.XX ±0.20  
X.XXX ±0.10  
Angle ±2°

TITLE:  
VH3.96 Housing

DRAWN: Arvin 2020.05.08

CHECKED:

APPROVED:

**KONNRA** 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co., Ltd.

PART NO.: H39610\*\*\*0101A

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

UNIT: mm

SCALE: N/A

SHEET: 1/1

PROJECTION

REV.: A2

DRAWING NO.: 3961H101-A-S

1

2

3

4

5

6

7

8

9