
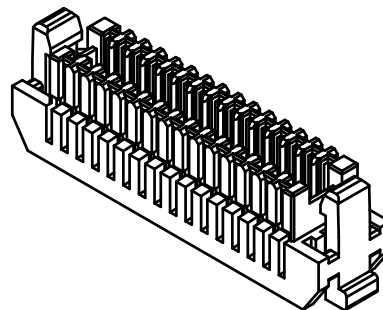


RoHS
COMPLIANT

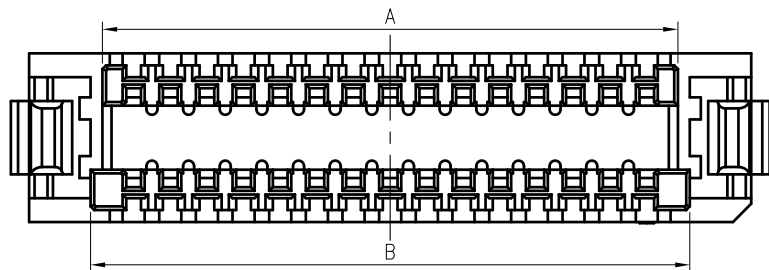

SPECIFICATIONS




1. Current rating: 1A AC, DC
2. Voltage rating: 50V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ/ min.
5. Withstanding voltage: 300V AC/ minute.
6. Contact resistance: 55mΩ/ max.

Material: PA66 UL 94V-0
 Suitable: KR1007 series terminal
 Mate with KR1007 series wafer
 Ordering Code:

H10070 *** 01 01A

No. of Circuits
 203:2x3,225:2x25

Insulator Material
 01:PA66 White V0
 02:PA66 Black V0

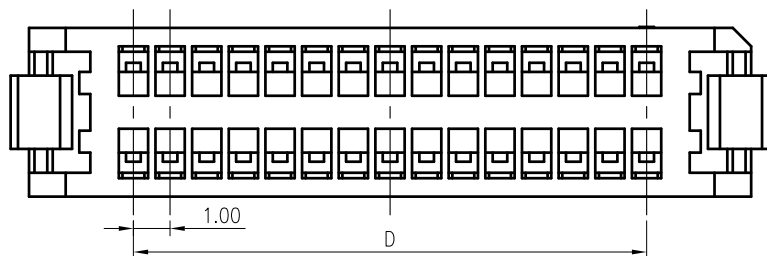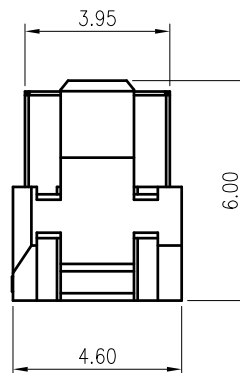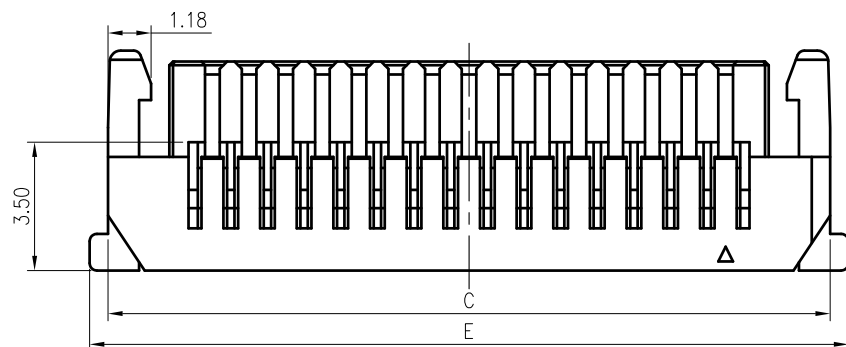

Circuits	Dimensions				
	A	B	C	D	E
2x3	3.70	4.35	7.70	2.00	8.70
2x5	5.70	6.35	9.70	4.00	10.70
2x6	6.70	7.35	10.70	5.00	11.70
2x10	10.70	11.35	14.70	9.00	15.70
2x15	15.70	16.35	19.70	14.00	20.70
2x20	20.70	21.35	24.70	19.00	25.70
2x25	25.70	26.35	29.70	24.00	30.70



MARK

REVISION DESCRIPTION

SIGNATURE

DATE

TOLERANCE
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±2°

TITLE:
 SHLD1.0 Housing

UNIT:mm SCALE:N/A

DRAWN: *Arwin 2020.09.02*

CHECKED:

APPROVED:

SHEET:1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
 DongGuan Konnra Electronics Co.,Ltd.

PART NO.:H10070*****01A

REV.:A1 DRAWING NO.:1007H201-A-S

1

2

3

4

5

6

7

8

9